


SALTO

inspired access




RADINIUM ACCESS

for Milestone XProtect®

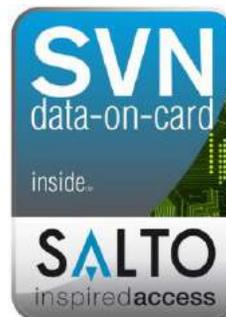

radinium
www.radium.com

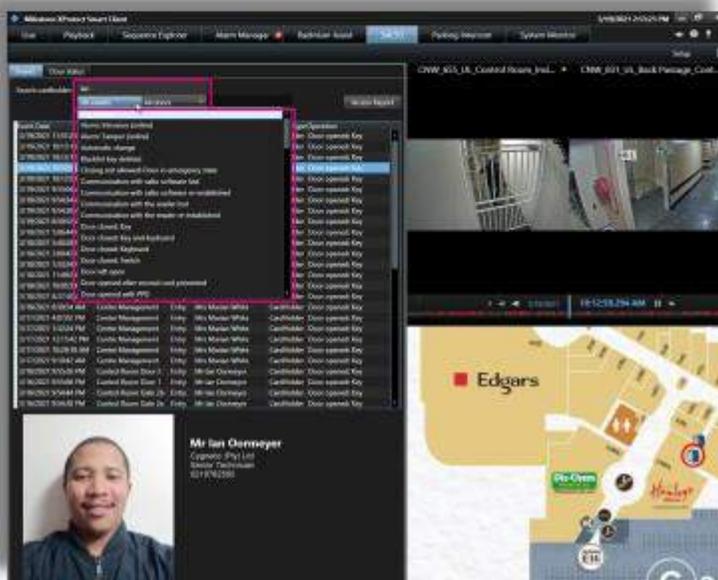

QUICK INSTALLATION GUIDE

Product Version: 1.0.0.1

Legal Notice

The information in this publication is furnished for information use only and does not constitute a commitment from Radinium for any of the features or functions discussed. Radinium assumes no responsibility or liability for the accuracy of the information presented, which is subject to change without notice. The Workflow and all other Radinium software or service names and slogans are registered trademarks of Radinium and all other registered trademarks are property of their respective owners.

Disclaimer

Access is provided by Radinium "as is" and "with all faults." Radinium makes no representations or warranties of any kind concerning the safety, suitability, lack of viruses, inaccuracies, typographical errors, or other harmful components of Access. There are inherent dangers in the use of any software and you are solely responsible for determining whether Access is compatible with your equipment and other software you have installed. You are solely responsible for the protection of your equipment and backup of your data. Radinium will not be liable for any damages you may suffer in connection with using, modifying or distributing Access.

Overview

This guide provides quick installation instructions on how to install Radinium Access - SALTO for Milestone XProtect®. It lists all product requirements and guides you through the installation process. It also explains how to obtain a 30-day Trial License and to configure your server. This guide can be used by system integrators and administrators.

Installation Prerequisites

Milestone Professional+, Expert, Corporate 2018 R3 or higher must be installed and working. SALTO SHIP module is required to be active on SALTO.

Windows LTSC
Windows 10 Pro
Server 2012 R2
Server 2016
Server 2019


Installing Access

1. Download Radinium Access from <http://www.radinium.com/salto>.
2. Run the setup package 'Radinium_Access_Server_1.0.0.1.msi' on the Milestone Management Server.
3. Do you want to install Radinium Access? Press Yes.
4. Installer will Extract.




5. Press Next.


6. Accept the terms in the License Agreement and press Next.

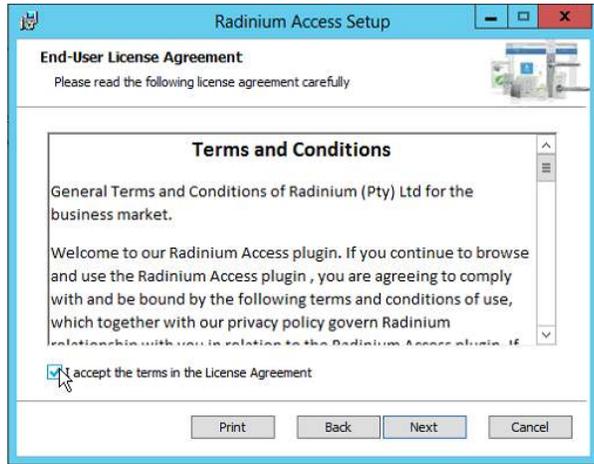


7. Select the Milestone Database Instance. Click on 'Browse' if an external SQL server is used.

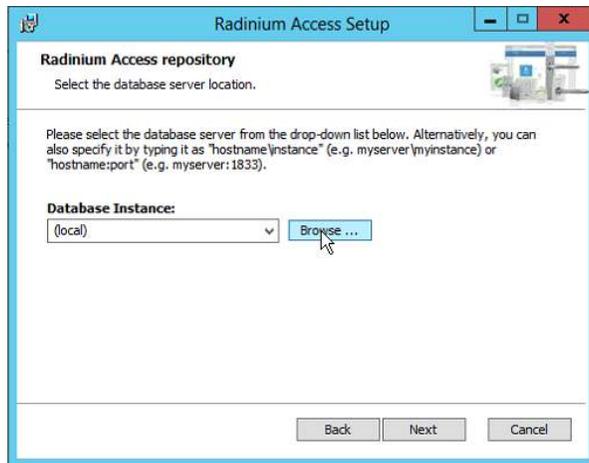


8. Click on 'Advanced'

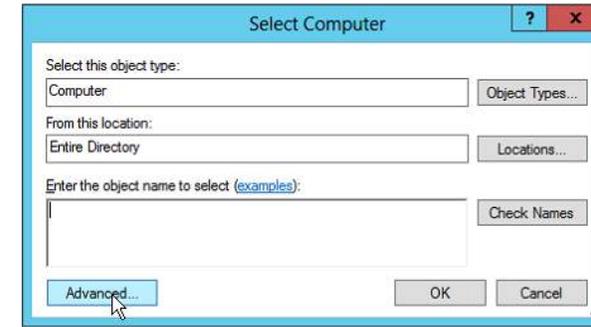


9. Double Click on the SQL instance or computer. 'SQL' is just an example as a separate SQL server on the CCTV.local domain.

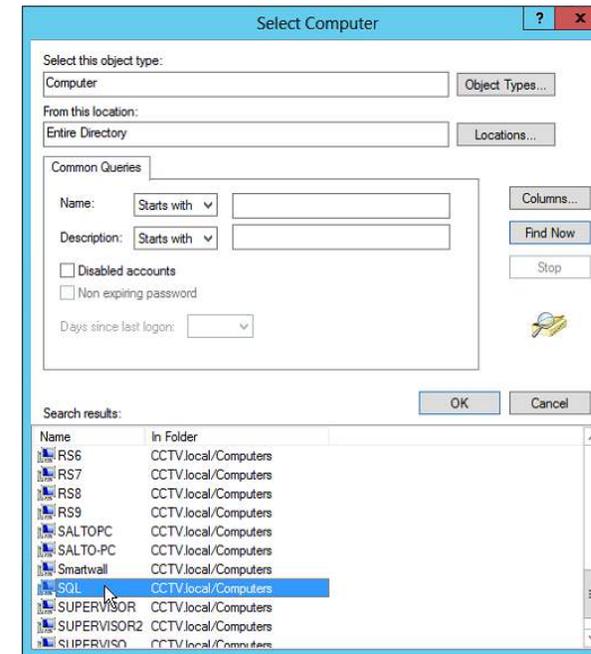


10. Press 'Next'.

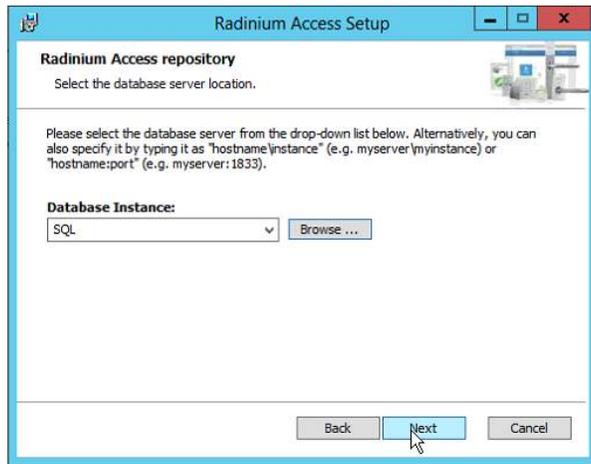


12. Click next by leaving the default Destination Folder.

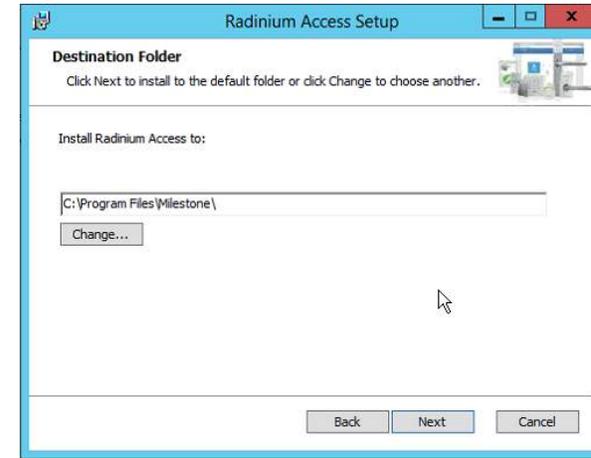


11. SQL Database login details and Test the Connection to press 'Next'.

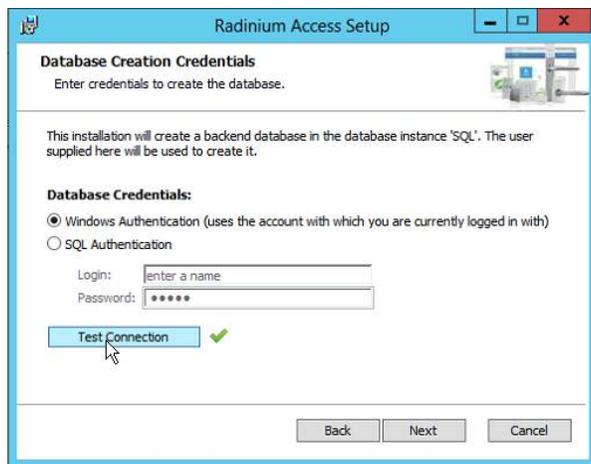

13. Press 'Install' to continue.

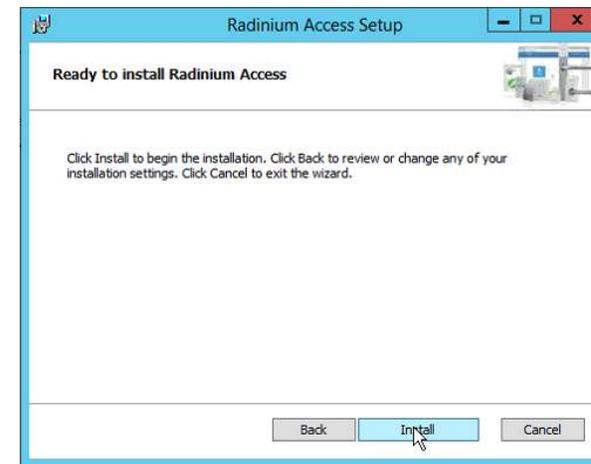

14. Press 'Finish'.

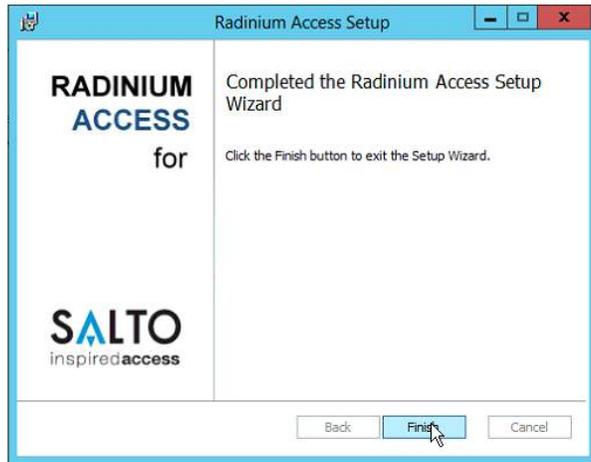


Configuration

1. Open the Milestone Management Client.
2. Go to MIP Plugins
3. Click on Radium Access.
4. The 'About' screen will appear.


Milestone Smart Client

For the Smart Client's, we have a separate install package.

1. Download and run the setup package 'Radium_Access_Client_1.0.0.1.msi' on each Smart Client machine.
2. Close the Smart Client before installation.

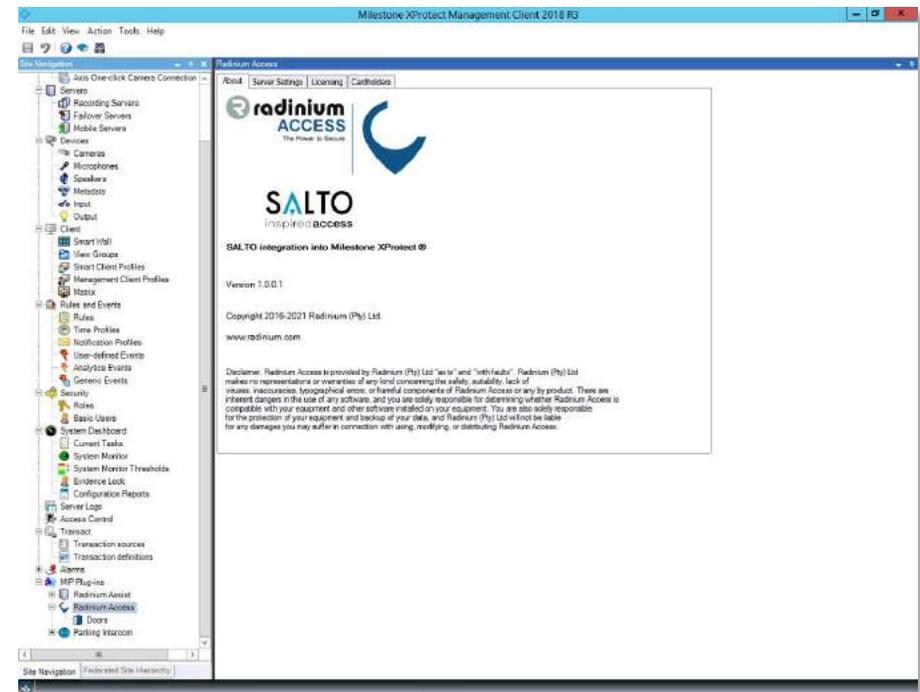

5. Click on 'Server Settings' tab.
6. Type in the 'Salto SHIP Server Hostname' (Server name) or IP address.
7. Type in the 'Salto SHIP Server Port'. You can find it by logging into the SALTO Web interface. Go to System -> General options -> SHIP tab. Enable SHIP and type in a Port number, ex. 9998. Press 'Save'.
8. Back to the Management Client, press 'Test SHIP connection and save settings'. If successful connection indicated, go to step 9.
9. The 'Engine (DataSource)' will display the same DB name selected during installation, and the Catalogue name 'RadiumAccess' will show. The 'Username' and 'Password' can be left blank if Windows Authentication is used to access SQL. If a SQL Authentication was chosen during SQL install, that 'Username' and 'Password' will be required. Press 'Test database connection and save settings'. If successful connection indicated, go to the 'Licensing' Tab.

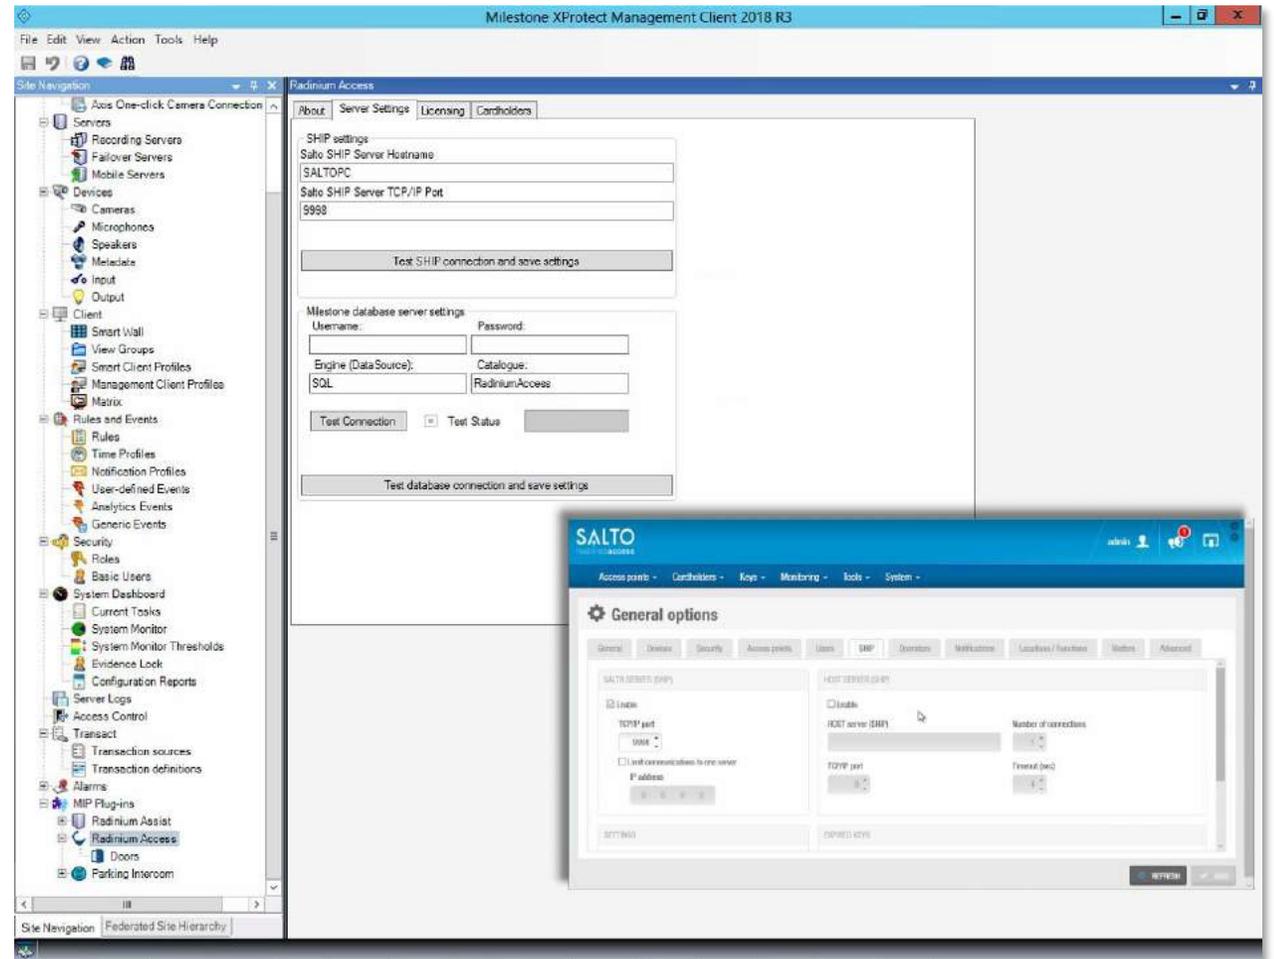


Obtaining a 30 day Trial License


1. Go to www.radium.com.
2. Click on Portal on the top menu.



3. Register an account if you do not have your login credentials.

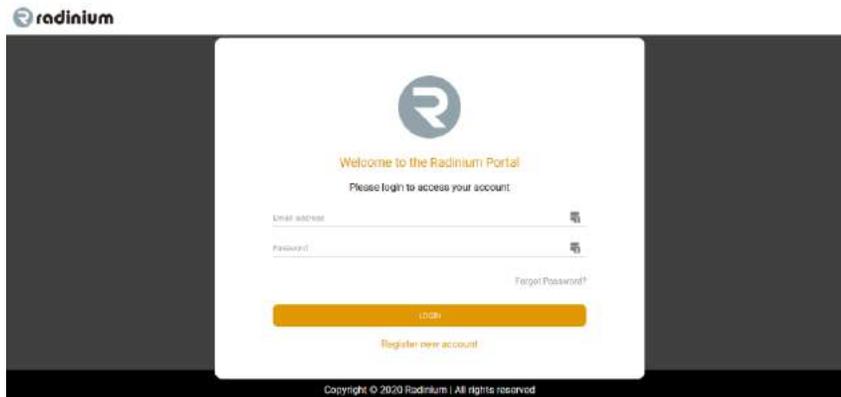


4. Once you are logged in, click on 'Add Site' button and enter your Site Name.

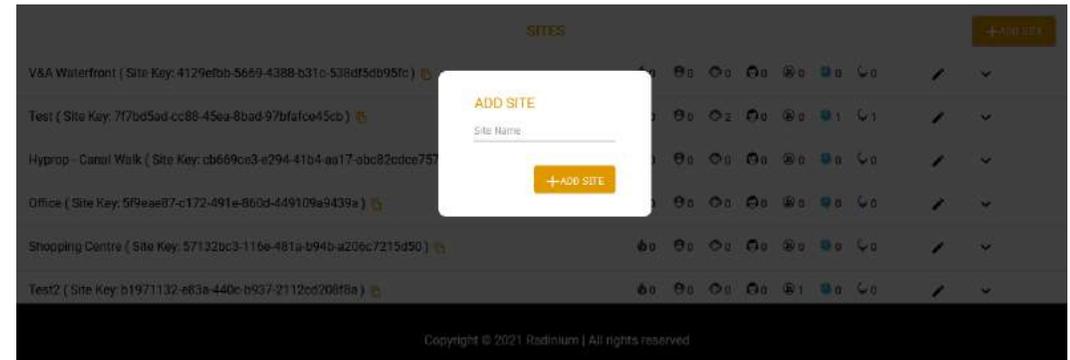

5. Copy your generated Site Key onto your clipboard by pressing the Copy icon or copy/select with your mouse.



6. Go back to the Milestone Management Client and MIP Plug-ins, Radium Access -> 'Licensing' tab. Copy the Site Key inside the Site Key box and Save. You will then see an unlicensed key. Click Retrieve License (Online) if you are connected to the Internet. It will retrieve a License with a 30-day grace period up to 10 000 doors linked with your Milestone SLC and Server ID.

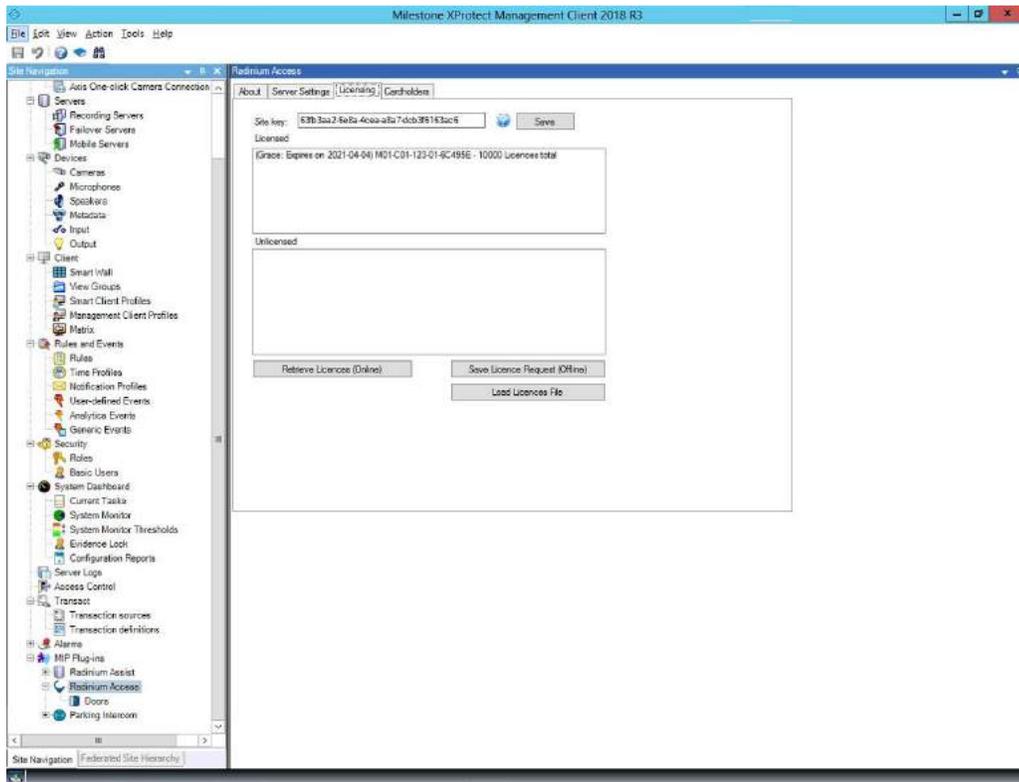

7. To check your Registered Trial License, go back to the Portal and click on the down arrow, which will show your Site License linked with your SLC.

Test (Site Key: 7f7bd5ad-cc88-45ea-8bad-97bfafce45cb)

Upload offline license request SUBMIT

Product Type	Serial number / SLC	Panel Number
SALTO (TRIAL)	BFEFBFF000306C3-American Megatrends Inc.V4.10To be filled by O.E.M.20150811000000.000000+000ALASKA - 1072009:MSIBase BoardTo be filled by O.E.M.	N/A
Workflow (ACTIVE)	M01-C01-132-02-6C4276	N/A
Workflow (TRIAL)	M01-C01-202-02-6C4202	N/A
Reports (TRIAL)	M01-C01-202-02-6C4202_85230277-e90c-4295-97c6-622da0293f58	N/A

Offline license request

Instead of retrieving your license online, you can Save License Request (Offline) in the Milestone Management Client in a .Irc file.

Take that file, go to your Portal and upload the Offline License Request. It will generate a .lic file, which you can then upload in the Management Client Radium Access Licensing tab by clicking on Load License File.

If you do not have internet onsite, go to the Offline License Request section in this document

Configure your Radinium Access


Cardholders

Go to 'Cardholders' tab. All SALTO Cardholders/Users will be retrieved automatically and maintained.

Select a user and add a picture/photo with contact information as required.

This will be displayed in the Smart Client.

Take note: Cardholders will not be retrieved if the license is not valid.

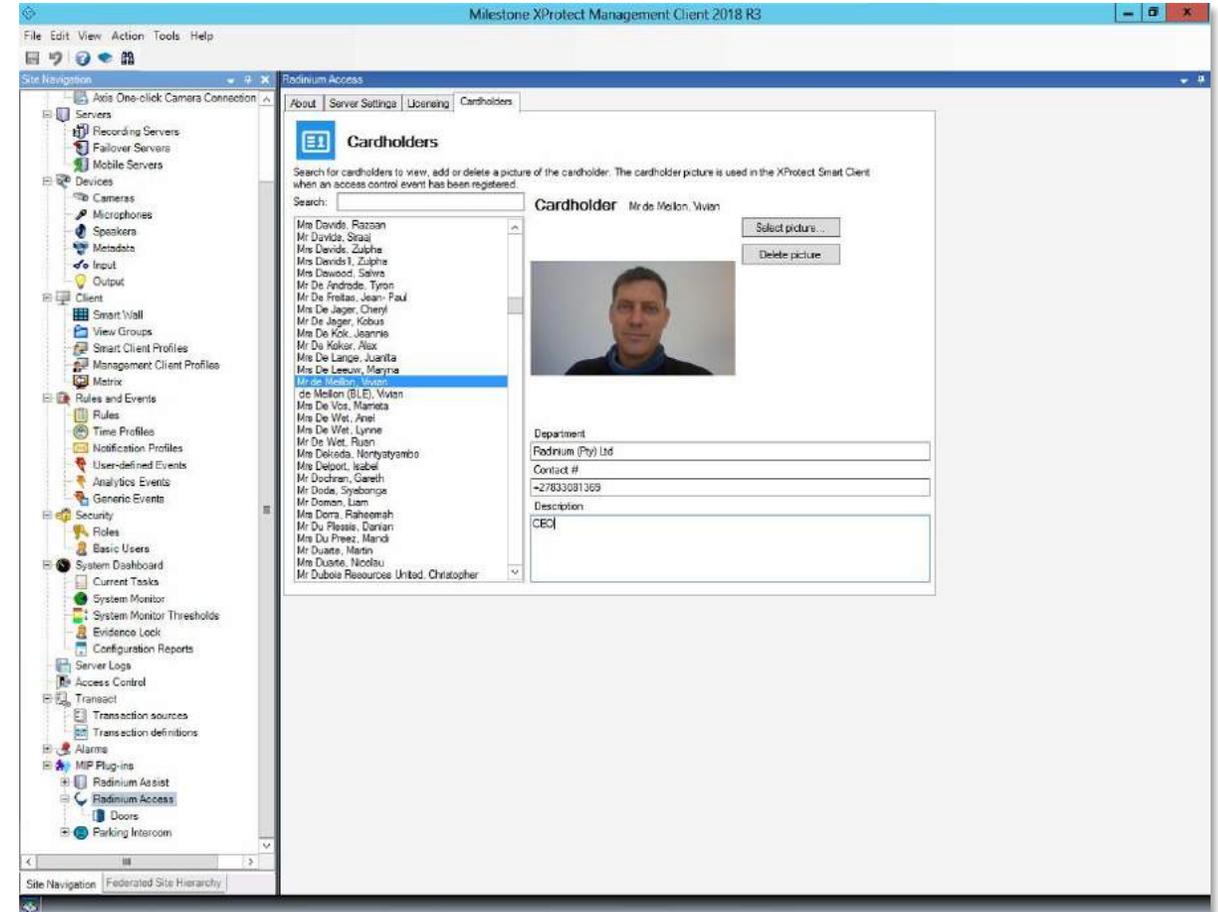

Doors

Go to 'Doors' on the tree menu. All SALTO doors will be retrieved automatically and maintained, depending on the number of door licenses you have. A warning message will appear if you do not have enough licenses per door. Those door over will only be active during the 30 day Grace Period.

Select a door and assign up to 2 cameras per door by selection.

Also add a Map for each door. Maps are pre-loaded within the Smart Client. Door icons can also be dragged-and-dropped on the map within the Smart Client.

Take note: Doors will not be retrieved if the license is not valid.

